

Shower & Bath

# Caprice

All the profits of the bath thanks to a versatile equipment

## Variable Height Bath & Integral Transfer System

REF. 7100.\*\*

When the access to the bath becomes difficult or impossible, the Caprice, thanks to its integrated transfer system, allows the disabled persons to benefit from an independent and secure bath. The variable height tub with a studied depth, guarantees working comfort and relaxation.



Caprice 7100.1GS71

**REVAL**  
SUSTAINABLE WELL-BEING

## Shower & Bath


### Caprice




Sense Digital Mixer



Watts Mixer



Short tub



Length tub



Integrated patient hoist



Aromatherapy



Air whirlpool



Disinfection system



Chromotherapy



Musicotherapy



Transfer trolley



Polyurethane pillow

## Shower & Bath

### Caprice



## Variable Height Bath & Integral Transfer System

**REF. 7100.\*\***

#### DESCRIPTION:

- Reinforced fibreglass tub with polished white gel coat colour finish, 2 dimensions of tub available: 170cm or 190cm with foot-rest.
- Variable height adjustment with dual 24V electric actuators..
- Shower handset with flow adjustment valve.
- Manual draining with overflow.
- Watts Eurotherm 54 l/min thermostatic mixing valve with non-return valves and anti-scald device. (according to version)
- 48 l/min "Rada Sense" bath & shower concealed digital mixing valve with non-return valves, anti-scald device, offering programmable max, min & default temperatures, automatic temperature on outlet selection, duty flush and thermal disinfection with datalogging capabilities. (according to version)
- Solar temperature displays.
- Compatible with Topaz transfer seats and stretchers. (according length of tub)
- Ø 40mm draining plug with siphon.
- IP66 control handset.
- 304L stainless steel patient hoist.
- Polyurethane seat and backrest cushions on versions with variable height.
- PVC seat on versions with fixed height.

#### DATAS:

- Max water volume (short tub) (until overflow) :240 litres
- Max water volume (length tub) (until overflow) :289 litres
- Tub Lifting range : 300mm
- Hoist lifting range : 400mm
- Filling time @ 3 bars: 4min30

#### CONFORMITY:

- CE Marking
- 73/23/CEE (Low voltage Directive).
- 89/336/CEE (EMC Directive).
- NF EN 60335-1 (Electric standard for bathtub...).
- NF EN 60335-2 -60 (Electric standard for bathtub...).
- NF EN 1717 (Anti-pollution...).

#### REFERENCES:


REF. 7100.1GW70R

- R = with upstand shower pole
- 0 = without hoist
- 1 = with integrated hoist
- 7 = tub length 172cm
- 9 = tub length 192cm
- W = Watts mixer
- S = Sense mixer
- G = Left version
- D = Right version
- 1 = Variable height tub
- 0 = Fixed height tub

#### EQUIPEMENTS EN OPTION:

- REF. 7100.10 Transfer trolley.
- REF. 7100.40 Disinfection shower hand set with trigger, flow adjustment, suction device of the disinfectant product with stop valve, 2 litres tank secured door with lock with key.
- REF. 7100.20 12 nozzles air whirlpool with integrated heater.
- REF. 7100.60 Colour-spa, 4 LED lamps, 6 colors.
- REF. 7100.70 Aromatherapy.
- REF. 7100.80 Musicotherapy. (Bluetooth device)

#### VERSION WITH VARIABLE HEIGHT (left model) :

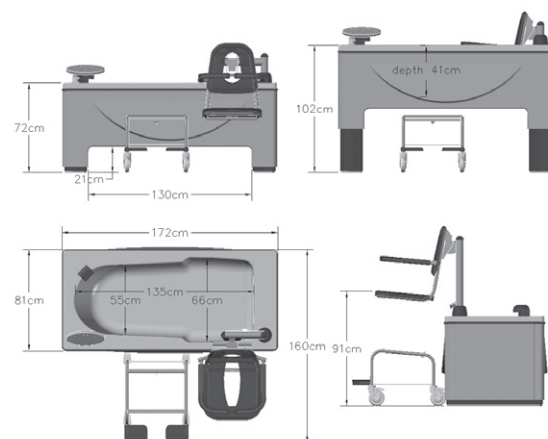

#### VERSION WITH FIXED HEIGHT (left model):

