

Hydrotherapy

Limbs Baths

Upper Limbs Baths

REF. 1320.00 - 1323.00 - 1324.00

The Upper Limb Baths form a device that allows thanks to two points of articulation an ease of positioning the two trays relative to the patient.

The model 1323.00 also has a console with a mixed water supply and the 1324.00 model with a variable height device.



REVAL
LE BIEN-ÊTRE DURABLE

Hydrotherapy




UNIQUE FEATURES

- Great capacity of the acrylic vats.
- 360° rotating arms.
- Thermostatic mixer with burn protection
- Stainless steel structure.


Upper Limbs Baths

REF. 1320.00 - 1323.00 - 1324.00


1320.00

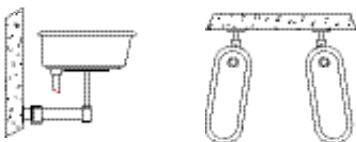

1323.00

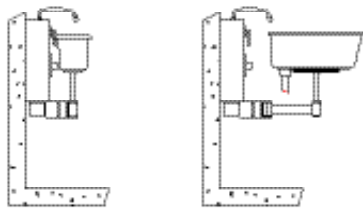

1324.00

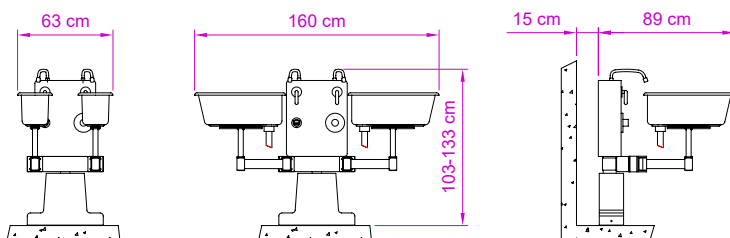

VERSIONS :

- REF1320.00 : 2 adjustable vats.
- REF1323.00 : 2 adjustable vats with mixed water feeding.
- REF1324.00 : adjustable vats with mixed water feeding and variable height system with battery operation.

CONFORMITY :

- NF EN 60601-1 Safety rules for electric appliances
- NF C15-100 Low voltage standard

TECHNICAL DATAS :

- Lifting range : 300mm
- Up/Down cycles : ≈ 100
- Vats in Acrylic equipped with overflow.
(white colour, 19 litres, length: 60cm, width: 23cm, depth: 22cm)
- Vat supports in stainless steel, with two articulation axis that allow an adjustment of spacing of the vats.(rotating on 360°).

DIMENSIONS :

- Outside width (unfolded vats) : 160cm
- Outside width (folded vats) : 63cm
- Overall height in low position : 103cm
- Overall height in high position : 133cm
- Outside depth (unfolded vats) : 40cm
- Outside depth (folded vats) : 89cm

ELECTRICITY :

- 24V electric controller, 240W max. with sound signal when low level batteries
- 24V electric actuator, 300mm stroke, disengageable (anti-crush safety).
- 2x12V batteries, 2.7Ah.
- 24V electric hand control, 2 functions.
- 24V charger, 250mA (supplied).

PLUMBING :

- Thermostatic mixer, flow 28 liters/min to 3 bars pressure with anti-burn safety.
- 1/2" taps for each filling nozzle.
- Reinforced & stainless steel hot and cold water flexible hoses.
- Digital temperature display

OPERATION :

The Variable Height Upper Limb Baths are equipped with an electric actuator for raising and lowering vats.

These can be oriented 360° thanks to the articulations.

The mixed water supply of the two tanks is done by 2 filling spouts, one thermostatic mixing valve and two faucets relating to each tank.